



# Bulk Food & Beverage Storage







## Model # SL4020

Installation & Crane Service by  
**US Chemical Storage**

**SUPPLY VOLTAGE**  
**480/3/60**

**LEGEND**

- DOT- DEPARTMENT OF TRANSPORTATION FLIP CHART PLACARD
- NF- NATIONAL FIRE PROTECTION ASSOCIATION 704 SIGN
- HDA- HOLD DOWN ANGLE (4)
- S- SUMP
- FP- FORKLIFT POCKETS ( )
- SGC- STATIC GROUND CONNECTOR
- BC- BUILDING COLOR
- NV- NATURAL VENTILATION WITH RAIN LOUVRE (2)
- SPS- SPRINKLER SYSTEM (2)
- I- INSULATION (R11) PROVIDED IN CEILING & WALLS
- FI- FLOOR INSULATION (R12)
- MV- (EXPLOSION PROOF) MECHANICAL VENT (2)
- DC- DRY CHEMICAL FIRE SUPPRESSION SYSTEM 45LB TANK (2)
- D1- 36" SINGLE DOOR 3 HR FIRE RATED (2)
- D2- 9' X 9' ROLL-UP DOOR 4 HR FIRE RATED (1)
- IL- (EXPLOSION PROOF) INTERIOR LIGHTING (8)
- LC1- LOAD CENTER 208V THREE PHASE 125AMP
- LC2- LOAD CENTER 480V THREE PHASE 100AMP
- DC-HVY DUTY SAFETY SWITCH DISCONNECT 480V 3P 60A
- SW1- (EXPLOSION PROOF) LIGHT & MECHANICAL VENT SWITCH (2)
- PH- PANIC HARDWARE FOR 36" DOOR (2)
- LL- LIFTING LUGS
- DP- ALUMINUM DIAMOND PLATE FLOOR

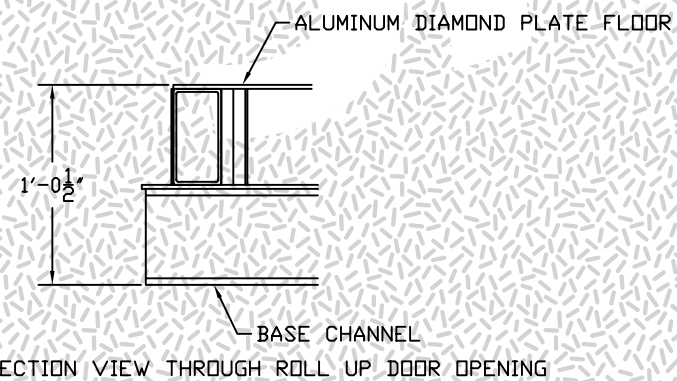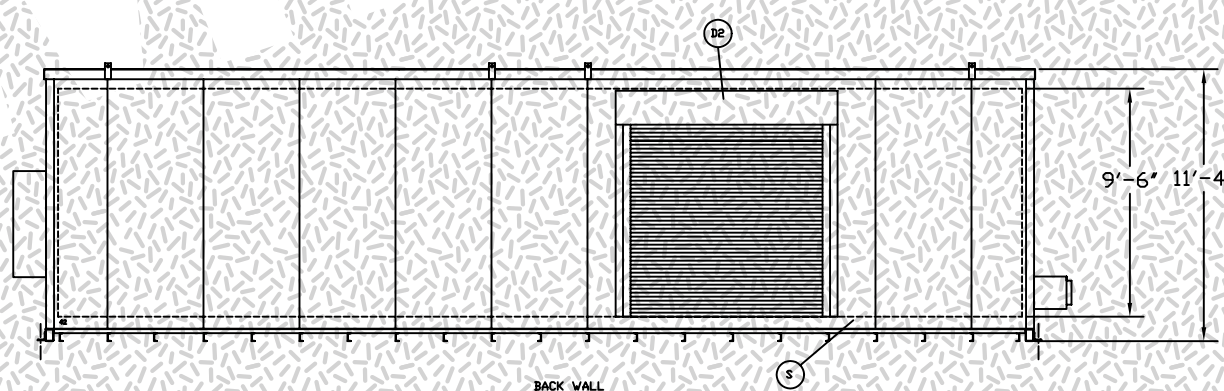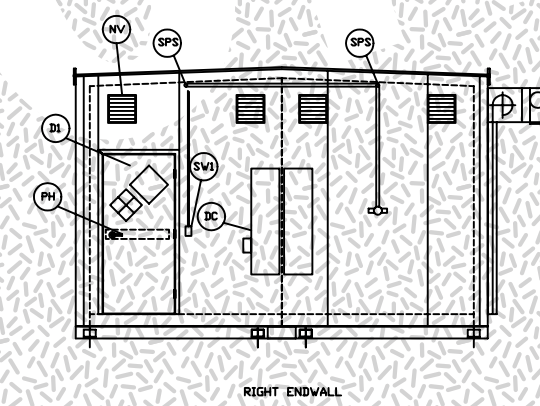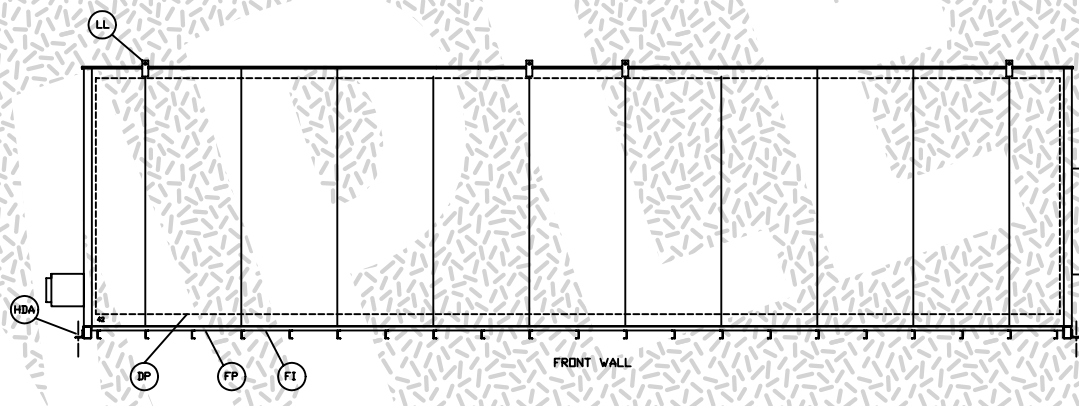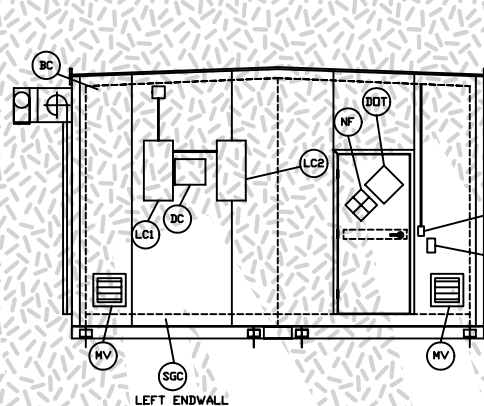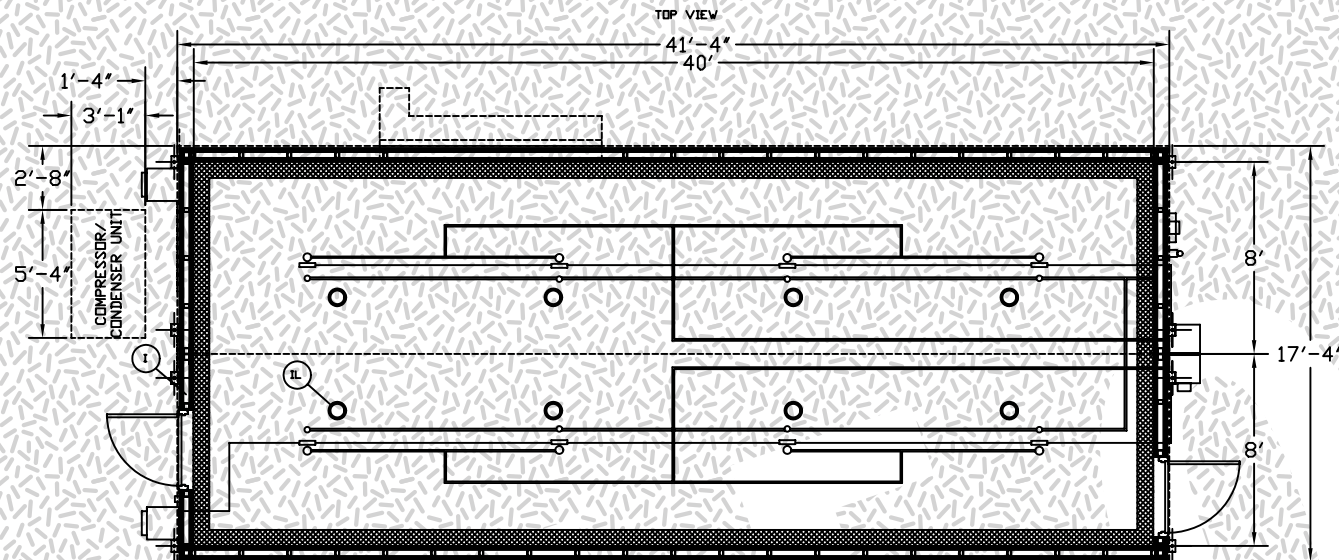

CUSTOMER:			
TITLE:			
<b>MODEL SL4020</b>			
DRAWING NO. <b>18-6244-02</b>			
DRAWN BY:	ORDER NO.:	DATE:	SHEET 1 OF 1

REV.	DESCRIPTION	BY	CHK BY	DATE
ACAD #:				