

# DrumLoc™

DrumLoc™ is the affordable storage building for chemical drum storage. Designed for storing agri-chemicals such as 55-gallon drums, pesticides, herbicides, fertilizers, combustibles, flammables and corrosives, these buildings are your solution for safe storage and compliance.

Manufactured in a wide array of sizes, DrumLoc is an affordable, simple solution to the problem of segregated, secure storage and compliance. Protect your hazardous materials from accidental contamination, while protecting the environment and your employees. We offer same day quotes as well as consultations.


## Standard Features

- FM Global approved
- 15 year structural warranty
- Natural draft ventilation
- Continuously welded heavy gauge steel construction
- Secondary containment—leakproof all welded sump
- 54" wide steel door system with 3-Point Lock Hardware
- Meets EPA and OSHA requirements
- 100% manufactured in the U.S.A.

## Colors



## Standard Sizes from 6 ft to 30 ft

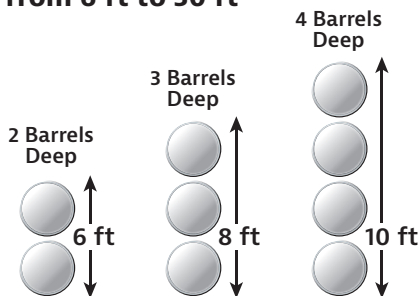

## 6, 8 and 10 Feet Deep Models

Larger and custom sizes are available. We offer same-day quotes as well as consultation.



**Call or visit us online today**

Phone: 1-800-233-1480

Email: [info@uschemicalstorage.com](mailto:info@uschemicalstorage.com)

Web: [USChemicalStorage.com](http://USChemicalStorage.com)

# Chemical Classifications

## Flammables

A flammable liquid is any liquid having a flashpoint below 100° F (37.8° C). However, the exception to this is any mixture having components with flashpoints of 100° F or higher when such components make up at least 99% of the mixture's volume. The flashpoint is the lowest temperature at which a flammable liquid will give off enough vapor to ignite briefly when exposed to a flame.

Flammable liquids are also referred to as Class 1 liquids. Class 1 liquids are separated into the following three classes:

**CLASS 1A:** Liquids that have flashpoints below 73° F (22.8° C), and a boiling point below 100° F (37.8° C). Examples of this class are Ethyl Ether and Pentane.

**CLASS 1B:** Liquids that have flashpoints below 73° F (22.8° C), and a boiling point of at least 100° F (37.8° C). Examples of this class are Acetone, Gasoline, and MEK.

**CLASS 1C:** Liquids that have flashpoints of at least 73° F (22.8° C), and below 100° F (37.8° C). Examples of this class are Turpentine and Xylene.

## Combustibles

A combustible is a liquid having a flashpoint of at least 100° F (37.8° C).

Combustibles are divided into two classes:

**CLASS II COMBUSTIBLES:** Liquids that have a flashpoint of at least 100° F (37.8° C), and below 140° F (60° C). However, the exception to this is any mixture having components with flashpoints of 200° F (93.3° C), when such components make up at least 99% of the total volume of the mixture. Examples of this class are Kerosene and most oil-based paints.

**CLASS III COMBUSTIBLES:** Liquids with flashpoints of at least 140° F (60° C). Class III combustibles are divided into these two subcategories:

**Class IIIA Combustibles** - Liquids having a flashpoint of at least 140° F (60° C), and below 200° F (93.3° C). However, the exception to this is any mixture having components with flashpoints of 200° F (93.3° C) or higher, when such components make up at least 99% of the total volume of the mixture. An example of this class is Mineral Spirits.

**Class IIIB Combustibles** - Liquids having a flashpoint of at least 200° F (93.3° C). Examples of this class are Hydraulic Brake/Transmission fluids, Lubricating Oils.

.....

**First Name:** \_\_\_\_\_ **Last Name:** \_\_\_\_\_

**Email:** \_\_\_\_\_ **Phone:** \_\_\_\_\_

**Company Name:** \_\_\_\_\_

### Size

Length: \_\_\_\_\_ Width: \_\_\_\_\_ Height: \_\_\_\_\_

### Doors

36" Swing - Qty: \_\_\_\_\_  60" Swing - Qty: \_\_\_\_\_

**Materials/Chemicals** (please list those to be stored in building)

\_\_\_\_\_

\_\_\_\_\_

**Color** (chemical-resistant epoxy coating)

White   Bone   Gray   Green

### Electrical Options

- Light
- Mechanical Fan
- Heating Min: \_\_\_\_\_ Max: \_\_\_\_\_
- Cooling Min: \_\_\_\_\_ Max: \_\_\_\_\_
- Fire Suppression System

### Building Options

- Portable Eyewash  Ramp  Cooling
- Shelving  1 tier  2 tier  3 tier  more
- Other: \_\_\_\_\_
- \_\_\_\_\_
- \_\_\_\_\_

### Delivery

ASAP  1-3 months  6+ months

### Setback from Occupied Structure

Inside  Attached  0-10 ft  10-75 ft  75+ ft

**To go over this form with us and discuss your needs, please call:**

1-800-233-1480 or fax it to 336-990-0076. Please include a phone number where we can reach you. Thank you!